

DD-0650-01 SHOWN FOR REFERENCE

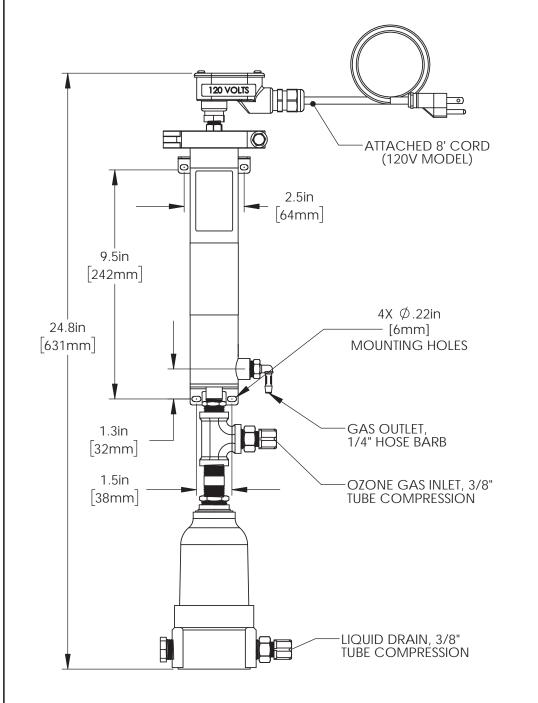

9-1140-50 SHOWN FOR REFERENCE

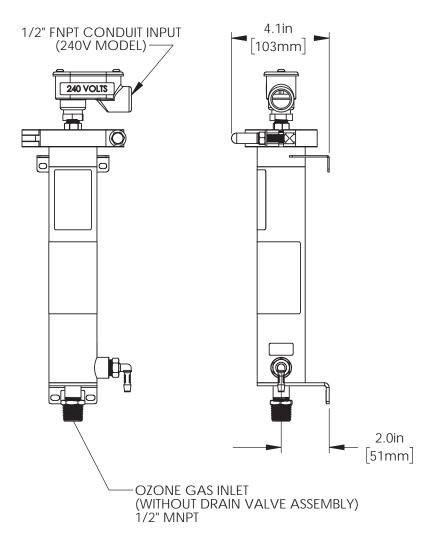

MODEL GUIDE	VOLTAGE		
	120V	240V	
COMPLETE DESTRUCT	DD-0650-01	DD-0650-50	
WITHOUT DRAIN VALVE ASSEMBLY	9-1140-01	9-1140-50	
DRAIN VALVE ASSEMBLY	9-1145-01		

SPECIFICATIONS:

POWER------ 120 OR 240 VAC (DEPENDING ON MODEL) 50/60Hz

D

C

В

B FORMAT REV A

A

REV. SHEET:

POWER CONSUMPTION-----10 VA

ELECTRICAL CONNECTION----NEMA 5-15P (120V) OR HARDWIRED W/CONDUIT (240V)

DESTRUCT TECHNOLOGY-----THERMAL CATALYTIC

RATED GAS FLOW------ 65 SCFH @ 7.5% O3 BY WEIGHT*

GAS HUMIDITY----- 0-100% RH


MATERIAL----- STAINLESS STEEL

WEIGHT----- 5.5 LBS WITH DRAIN VALVE ASSEMBLY
4.5 LBS WITHOUT DRAIN VALVE ASSEMBLY

* FOR <100 PPB AT DESTRUCT OUTLET

FLOW CHARACTERISTICS (MEASURED WITH DRAIN VALVE ASSEMBLY)

PRESSURE VS FLOW

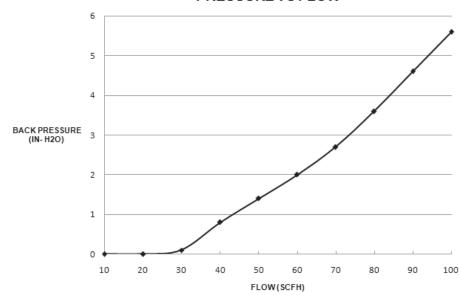

	С	Show New Drain Valve assembly orientation	6003	08/24/2017		
	В	ADD BARBED FITTING TO OUTLET	5543	6/4/2015		
	Α	INITIAL PRODUCTION RELEASE	5294	7/1/2014		
ZONE	REV.	DESCRIPTION	ECN	DATE		
REVISIONS						

8

ALL DIMENSIONS IN INCHES [mm]	APPROVALS:	DATE:	PROP
TOLERANCES:	DRAWN: J.WILSON	7/1/2014	THIS D
.x ± .1 .xx ± .02 ANGLES±1° .xxx ± .010	ENGR. APPR: Digitally signed by DN: cn=T.MCNEIL, email=tmcneil@de Date: 2017.10.20.0	o, ou, elozone.com, c=US	IS PRO TO USE DISC
MATERIAL: NA	CHECKED:		OR IN WITHO
FINISH: NA	Q.A. APPR:		FR

PROPERTY OF DEL OZONE

THIS DOCUMENT AND THE
DATA DISCLOSED HEREIN
IS PROPRIETARY. IT IS NOT
TO BE REPRODUCED,
USED, OR OTHERWISE
DISCLOSED IN WHOLE,
OR IN PART, TO ANYONE,
WITHOUT WRITTEN CONSENT
FROM DEL OZONE.

DEL ©Z©NE,
advanced sanitation solutions

INTERPRET DRAWING \$175.

DO NOT SCALE DRAWING

SPECIFICATION, DRAWING, MEDIUM_DESTRUCT

INTERPRET DRAWING PER ANSI Y14.5-1994
SCALE: 1:8

B

2

TITLE:

DWG. NO:

4-2186-01 C 1 OF 1

7 6 5 4 3