
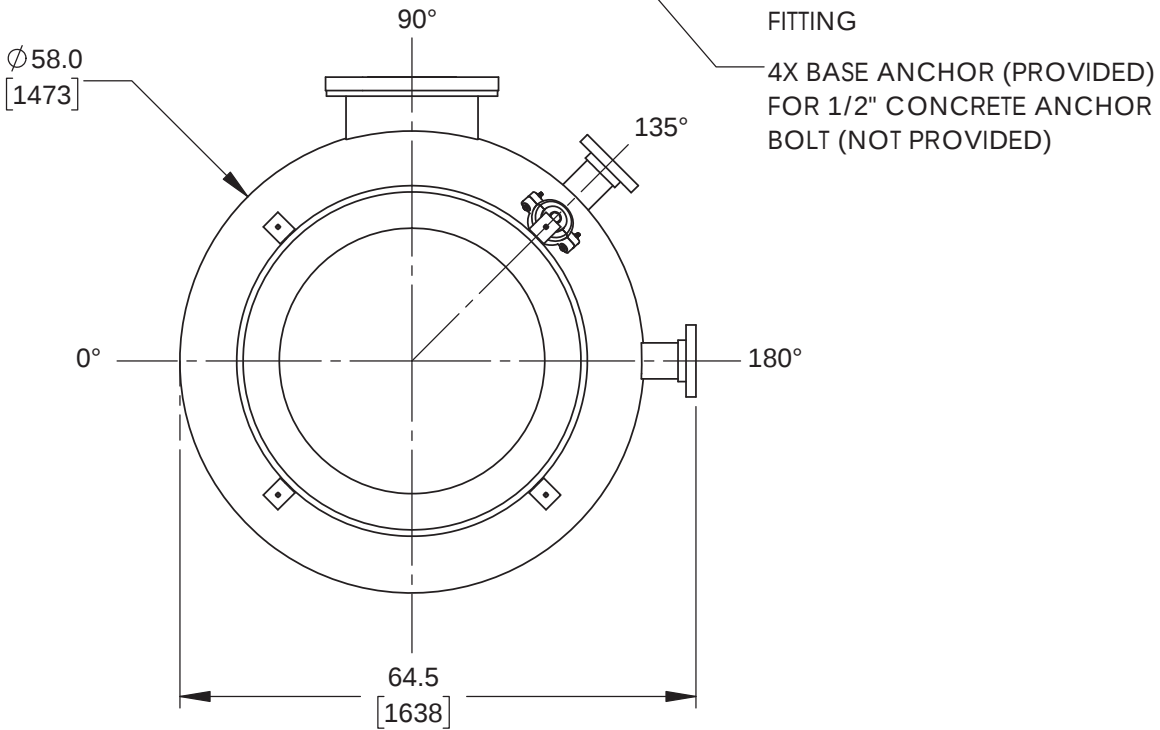
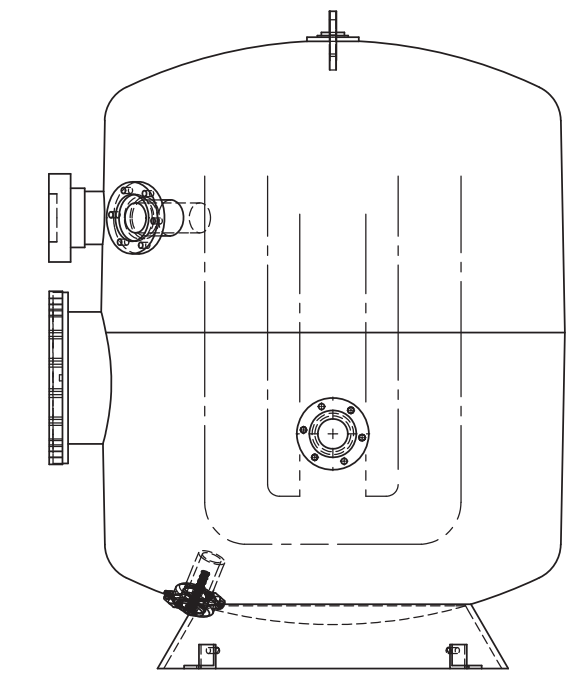
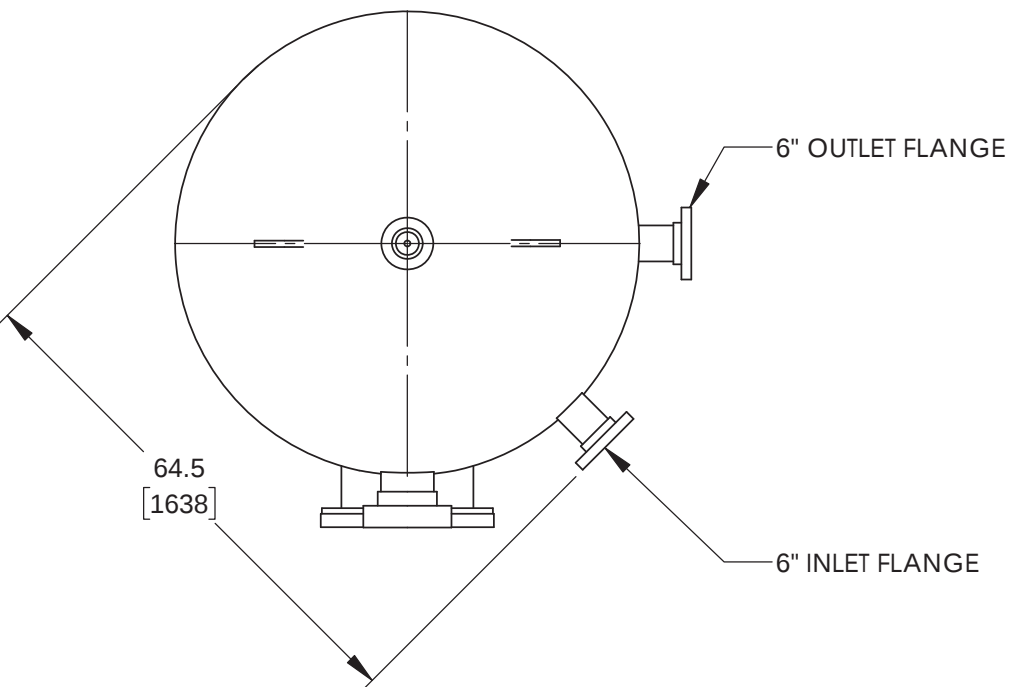


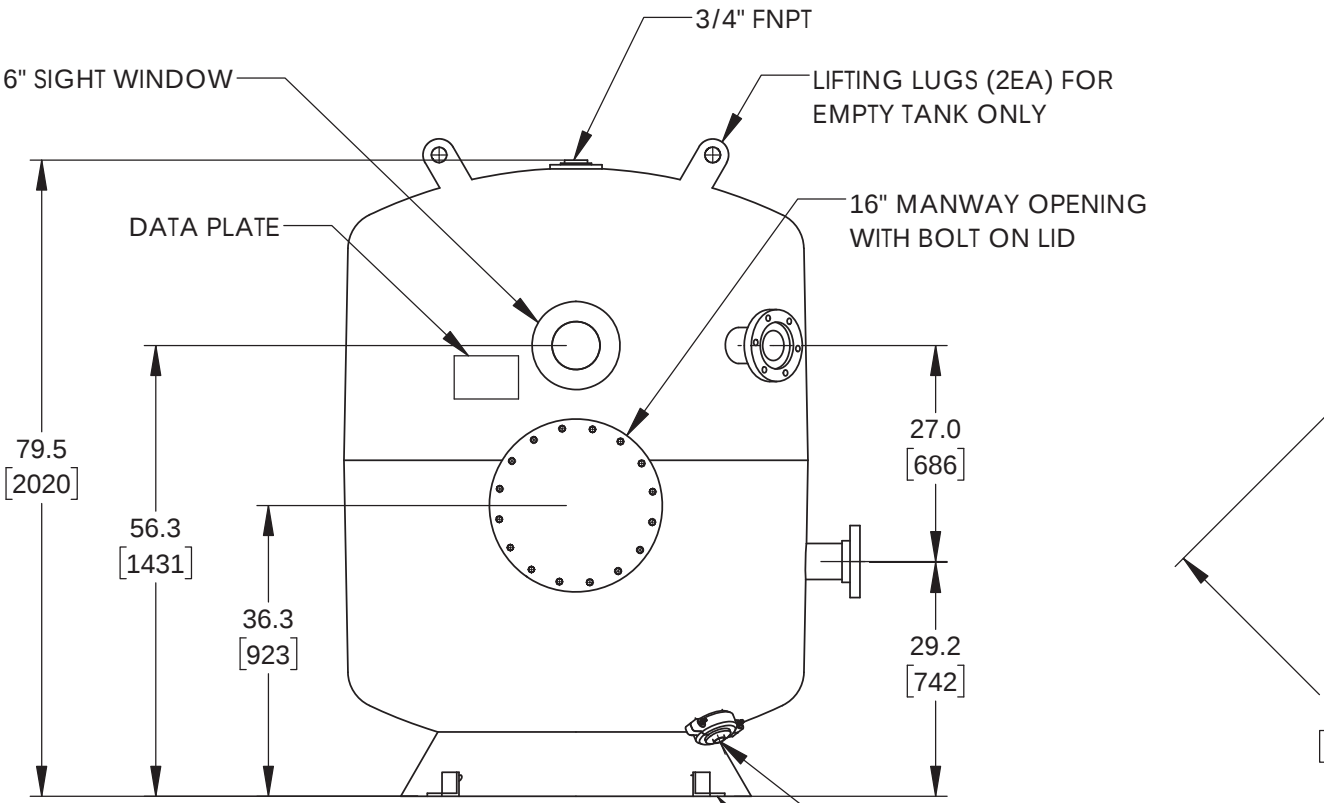

BOTTOM VIEW

SPECIFICATIONS	
MODEL	7-CT-0600-02
MATERIALS	TANK: HIGH STRENGTH FIBERGLASS, VINYL ESTER RESIN, REINFORCED CORROSION RESISTANT LINER INTERNAL PLUMBING: SCH 80 PVC 1 HARDWARE: 316 SS
PRESSURE	50 PSI WORKING PRESSURE WITH 4:1 SAFETY FACTOR
SEISMIC	ZONE 4
AGENCY	NSF/ANSI STANDARD 50

NOTES

1. DEL PROPRIETARY INTERNAL BAFFLING TO MEET NSF CONTACTING REQUIREMENTS.
2. LIFTING LUGS TO BE USED ONLY WITH EMPTY TANK.

ZONE	REV.	DESCRIPTION	ECN	DATE
	B	UPDATE WITH NEW MANWAY COVER AND DRAIN	ECN01708	03/22/2019
	A	INITIAL RELEASE	4938	7/26/2012
REVISIONS				

DIMENSIONS INCHES [mm]		APPROVALS:		DATE:		PROPERTY OF DEL OZONE THIS DOCUMENT AND THE DATA DISCLOSED HEREIN IS PROPRIETARY. IT IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE, OR IN PART, TO ANYONE, WITHOUT WRITTEN CONSENT FROM DEL OZONE. DEL ozone advanced sanitation solutions		TITLE:				
TOLERANCES: .X ± .1 .XX ± .02 .XXX ± .010 ANGLES±5°		DRAWN: R. BYLARD		7/26/2012				SPEC_DRAWING O3 CONTACT TANK, 600GAL,OFF_SET_IN_OUT				
		ENGR. APPR: Frank Martin Digitally signed by Frank Martin DN: cn=Frank Martin, o=DEL Ozone, ou, email=fmartin@delozone.com, c=US Date: 2019.04.05 09:24:32 -0700										
		MATERIAL:										
FINISH:		Q.A. APPR:				INTERPRET DRAWING PER ANSI Y14.5-1994		SIZE:	DWG. NO:		REV.	SHEET:
						SCALE: 1:24 DO NOT SCALE DRAWING		B	4-1767-98		B	1 OF 1